



## REMOTE HANDSET CODING INSTRUCTIONS B&D AND CHAMBERLAIN 433MHZ



### TO CODE YOUR NEW REMOTE USING THE MOTOR PANEL

If you have access to the motor operating your door, you can use these instructions. However, if the door/gate motor is shared with other tenants at a residential/commercial complex, **do not** use these instructions.

#### To code in the remote:

1. Ensure your new battery is installed correctly in the new remote
2. Open the cover, if any, on your MOTOR to access the LEARN BUTTON (see diagrams on reverse)
3. Press the remote control button you would like to operate the door AND HOLD IT DOWN
4. Press and release the LEARN button on your MOTOR, the LEARN LIGHT should blink (or you may simply hear TWO CLICKS)
5. RELEASE the remote control button
6. The programming sequence is complete
7. Press the remote control button to test operation of the door

#### To code in the remote to operate 2 or 3 DOORS/GATES:

1. Remove the cover on each door's motor CONTROL PANEL.
2. Repeat the above process using a DIFFERENT button on the remote to operate each door/gate

### TO DELETE ALL STORED CODES FROM A DOOR

Do not do this if the door is shared with other tenants at a residential/commercial complex.

1. Press and hold down the LEARN button for APPROX SIX SECONDS – until the LEARN light goes OFF
2. When the LEARN light switches OFF all remotes will no longer operate the door

### TO DELETE ALL STORED CODES FROM A GATE


Do not do this if the gate is shared with other tenants at a residential/commercial complex.

1. Press and hold down the ERASE button (button (4) ON DIAGRAM 4 shown on reverse) for approximately FIFTEEN seconds until the RED LIGHT goes OFF
2. When the LEARN light switches OFF all remotes will no longer operate the gate


*Thank you for your purchase.*

*Our Customer Support team are available weekdays 8am-5pm on (07) 5476 9227 if you have any further questions.*


**DIAGRAM 1 : ON ROLLING DOOR MOTORS:**  
 THE LEARN BUTTON IS SHOWN AS "2" IN DIAGRAM BELOW  
 THE LEARN LIGHT IS SHOWN AS "1" IN DIAGRAM BELOW

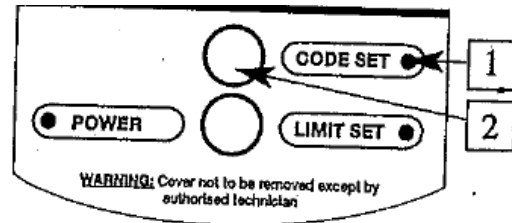

**DIAGRAM 2 : ON PANEL SECTIONAL DOOR MOTORS:**  
 THE LEARN BUTTON IS SHOWN AS "2" IN DIAGRAM BELOW  
 THE LEARN LIGHT IS SHOWN AS "1" IN DIAGRAM BELOW




**DIAGRAM 3 : ON OLDER STYLE PANEL DOOR MOTORS:**  
 THE LEARN BUTTON IS SHOWN AS "2" IN DIAGRAM BELOW  
 THE LEARN LIGHT IS SHOWN AS "1" IN DIAGRAM BELOW

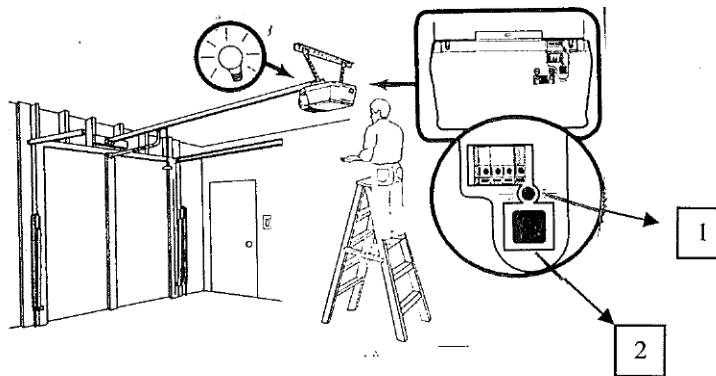

**DIAGRAM 4 : ON GATE MOTORS:**

Open the cover on the Control Unit by removing the 4 screws. Locate the Receiver Board as shown below:  
 THE LEARN BUTTON IS SHOWN AS "2" IN DIAGRAM BELOW  
 THE LEARN LIGHT IS SHOWN AS "1" IN DIAGRAM BELOW

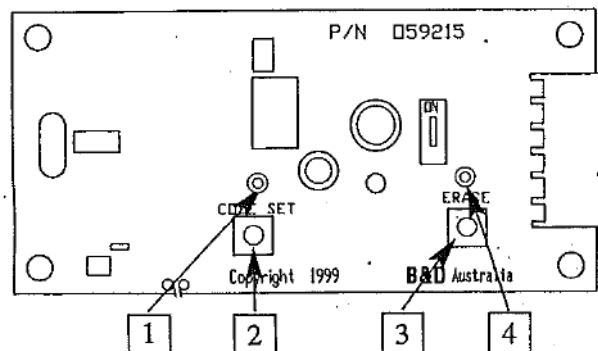

*Thank you for your purchase.*

*Our Customer Support team are available weekdays 8am-5pm on (07) 5476 9227 if you have any further questions.*